


High Flex Life Camera Link Cable

Made in Japan

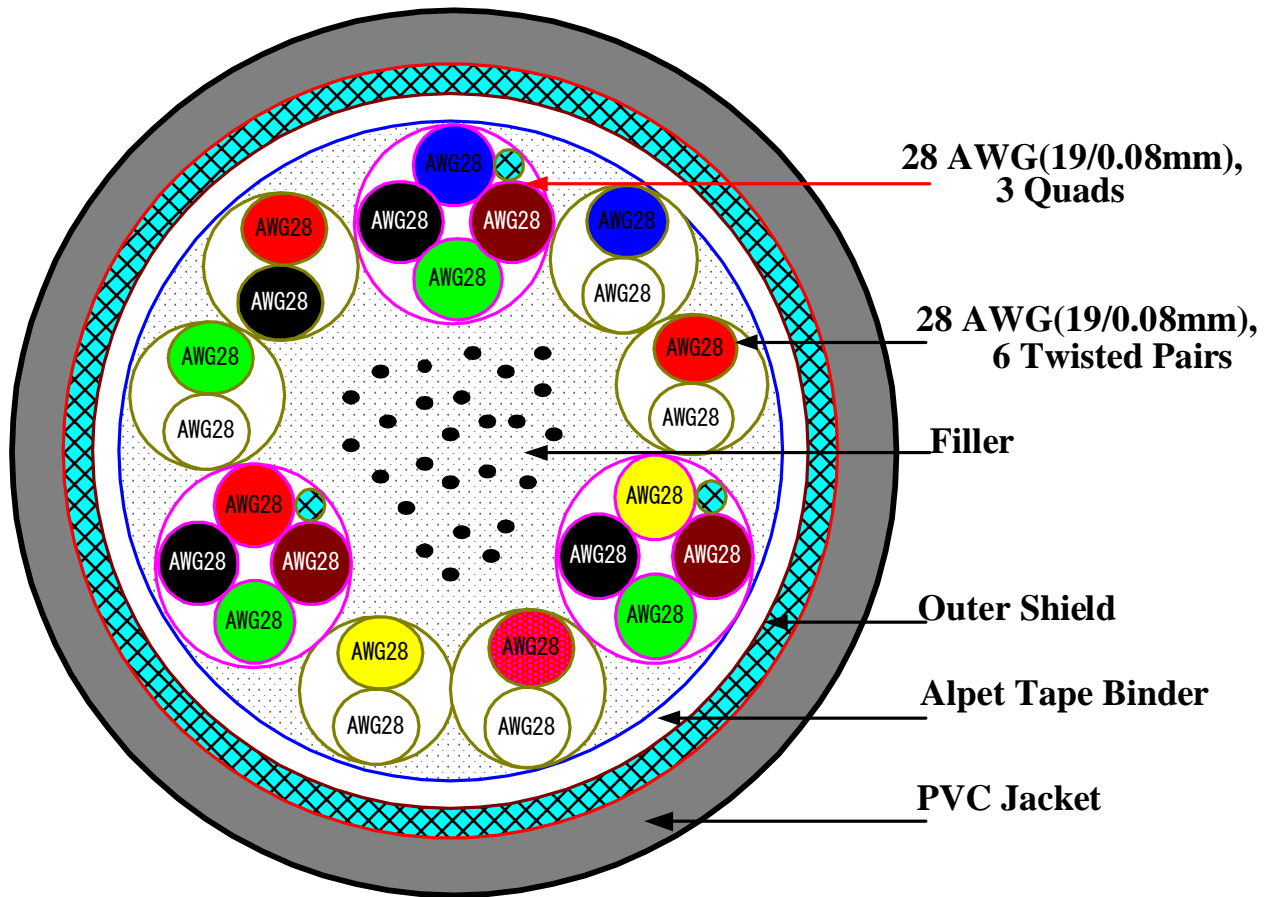

Cable** UL AWM 20276 80° C VW-1 E46560 DENSHI BLOCK JAPAN P

Cable Color	Black
Outer Diameter	8.8 ±0.1 mm
Temperature Rating	80°C
Conductor Resistance at 20°C	Less than 240 Ω/km
Insulation Resistance	Over 100 MΩ-km
Withstanding Voltage	350V AC for 1 minute
Voltage Rating	30V AC
Characteristic Impedance	100Ω ± 10Ω
Propagation Speed	4.7 ns/m ± 10%
Skew (within pair)	50 ps/m maximum
RoHS Compliant	Yes
UL Style	UL 20276

SFCC Vision Systems
USA
www.CamCables.com