




High Flex Life MDR-MDR Camera Link Cable

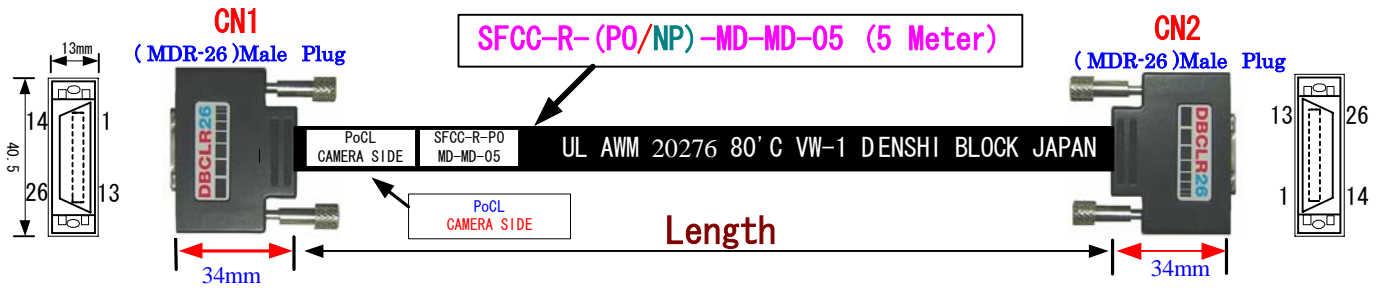

Pin Number For **PoCL**

Camera Side	Channel Link	FGB Side
CN 1	Signal	CN 2
2	X0 -	25
15	X0 +	12
3	X1 -	24
16	X1 +	11
4	X2 -	23
17	X2 +	10
5	Xclk -	22
18	Xclk +	9
6	X3 -	21
19	X3 +	8
7	Ser TC +	20
20	Ser TC -	7
8	Ser TFG -	19
21	Ser TFG +	6
9	CC1 -	18
22	CC1 +	5
10	CC2 +	17
23	CC2 -	4
11	CC3 -	16
24	CC3 +	3
12	CC4 +	15
25	CC4 -	2
1	+12V	1
26	+12V	26
13	Inner Shield	13
14	Inner Shield	14
Shell	Braid Shield	Shell

Pin Number For **Non PoCL**

Camera Side	Channel Link	FGB Side
CN 1	Signal	CN 2
14	X0 X1 GND	13
2	X0 -	25
15	X0 +	12
3	X1 -	24
16	X1 +	11
1	X2 XC GND	26
4	X2 -	23
17	X2 +	10
5	XC -	22
18	XC +	9
6	X3 -	21
19	X3 +	8
7	Ser TC +	20
20	Ser TC -	7
13	X3 Ser TC GND	14
8	Ser TFG -	19
21	Ser TFG +	6
9	CC1 -	18
22	CC1 +	5
10	CC2 +	17
23	CC2 -	4
11	CC3 -	16
24	CC3 +	3
12	CC4 +	15
25	CC4 -	2
26	NC	1
Shell	Braid Shield	Shell

★ **PoCL** = Power Over Camera Link = PO

NP = Non PoCL = No Power

★ All Cable assemblies thoroughly inspected by the following tests.

- Continuity and High Voltage AC Isolation Test
- Eye Pattern Test

Made in Japan